

Traction T/A®

BFGoodrich®
Tires
TAKE CONTROL®

Outstanding all-season performance.

What it is: The tire that takes all-season traction to a new level. 15% more dry traction*. 10% more wet traction*. 10% more snow traction*. For more control 365 days a year. H- and V-rated sizes come with a 60,000-mile Manufacturer's Limited Treadlife warranty, T-rated sizes with a 70,000-mile Manufacturer's Limited Treadlife warranty. See warranty for details.

Who it's for: Coupe, sedan, minivan and mini-SUV owners who won't compromise when it comes to smooth ride, long treadlife – and outstanding all-season performance.

Features:

- Premium high-silica tread compound (H/V)
- ETEC System™ (Equal TEnsion Containment)
- Directional tread pattern
- Racing-derived tread profile
- g-Wedge™ sidewall stabilizers

Benefits:

- Helps provide exceptional grip in dry, wet and snow without sacrificing tread life**
- Excellent strength, smooth ride, consistent footprint and maximized tread contact area under high-speed conditions
- Usually found only in premium, high-performance tires and racing tires; helps increase water evacuation for improved wet traction
- Profile technology adapted from our Traction T/A® racing tire helps provide flatter footprint, maximizing contact in dry and shallow water for excellent acceleration, cornering and braking
- Reinforced sidewalls in cornering and lane-change maneuvers for crisp, sure response to steering inputs
- T, H, V-rated: capable of speeds up to 118 mph[†] (T-Rated), 130 mph (H-Rated), 149 mph (V-Rated)

*As compared to P225/60R16 BFGoodrich® Touring T/A® TR4 tire in dry handling, wet handling and snow traction tests.

**H and V sizes

TRACTION T/A®
60,000
MILE WARRANTY
TRACTION T/A 60,000 MILE MANUFACTURER'S LIMITED TREADLIFE WARRANTY

H/V-rated


TRACTION T/A®
70,000
MILE WARRANTY
TRACTION T/A 70,000 MILE MANUFACTURER'S LIMITED TREADLIFE WARRANTY

T-rated



UTQG RATING:

Description	Treadwear	Traction	Temperature
Traction T/A®			
V- and H- rated	440	AA	A
T- rated	620	A	B

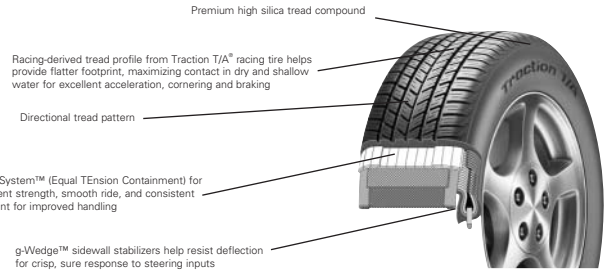

H/V- rated version

Tire Size	Service Desc.	Sidewall	MSPN	Stock #	Rim Width Range (inches)	Section Width on Measuring Rim Width*	Overall Dia.	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)	OE Fitments	Available
185/60R14	82H	RBL	56416	216-476	5.0 - 6.5	7.4 on 5.5	22.8	10.0	912	1047@44		
P185/65R14	85T	BSW	42299	122-178	5.0 - 6.5	7.4 on 5.5	23.5	10.0	885	1124@44		3Q
185/65R14	86H	RBL	47075	216-163	5.0 - 6.5	7.4 on 5.5	23.5	10.0	885	1168@44		
P185/70R14	87T	BSW	52152	122-410	4.5 - 6.0	7.4 on 5.5	24.3	10.0	856	1201@44		3Q
195/60R14	86H	RBL	97753	216-478	5.5 - 7.0	7.9 on 6.0	23.2	10.0	897	1168@44		
P195/65R14	88H	RBL	62846	216-451	5.5 - 7.0	7.9 on 6.0	24.0	10.0	867	1235@44		
P195/70R14	90H	RBL	89617	216-413	5.0 - 6.5	7.9 on 6.0	24.8	10.0	839	1312@44		
P195/70R14	90T	BSW	50313	122-413	5.0 - 6.5	7.9 on 6.0	24.8	10.0	839	1312@44		
205/60R14	88H	RBL	54837	216-480	5.5 - 7.5	8.2 on 6.0	23.7	10.0	878	1235@44		
P185/60R15	84T	BSW	76551	122-255	5.0 - 6.5	7.4 on 5.5	23.7	10.0	878	1102@44		
P185/65R15	86H	RBL	77868	216-283	5.0 - 6.5	7.4 on 5.5	24.5	10.0	849	1168@44		
185/65R15	88T	BSW	51881	122-014	5.0 - 6.5	7.4 on 5.5	24.5	10.0	849	1235@44		
P195/55R15	84V	RBL	83686	208-553	5.5 - 7.0	7.9 on 6.0	23.4	10.0	889	1102@44		
P195/60R15	87T	BSW	19652	122-487	5.5 - 7.0	7.9 on 6.0	24.2	10.0	860	1190@44		3Q
195/60R15	88H	RBL	99917	216-488	5.5 - 7.0	7.9 on 6.0	24.2	10.0	860	1235@44		
P195/65R15	89T	BSW	88016	122-362	5.5 - 7.0	7.9 on 6.0	25.0	10.0	832	1279@44		
195/65R15	91H	RBL	62291	216-891	5.5 - 7.0	7.9 on 6.0	25.0	10.0	832	1356@44		
205/55R15	88V	RBL	97206	208-205	5.5 - 7.5	8.4 on 6.5	23.9	10.0	870	1235@44		
P205/60R15	90T	BSW	16379	122-515	5.5 - 7.5	8.2 on 6.0	24.7	10.0	842	1301@44		3Q
205/60R15	91H	RBL	58232	216-489	5.5 - 7.5	8.2 on 6.0	24.7	10.0	842	1356@44		
P205/65R15	92T	BSW	82562	122-580	5.5 - 7.5	8.2 on 6.0	25.5	10.0	816	1400@44		
205/65R15	94H	RBL	85526	216-892	5.5 - 7.5	8.2 on 6.0	25.5	10.0	816	1477@44		
205/65R15	94V	RBL	73550	208-892	5.5 - 7.5	8.2 on 6.0	25.5	10.0	816	1477@44		
P205/70R15	95T	BSW	81465	122-658	5.0 - 7.0	8.2 on 6.0	26.3	10.0	791	1499@44		
P215/60R15	93T	BSW	81547	122-510	6.0 - 7.5	8.7 on 6.5	25.2	10.0	825	1411@44		
215/60R15	94H	RBL	61970	216-490	6.0 - 7.5	8.7 on 6.5	25.2	10.0	825	1477@44		
P215/65R15	95T	BSW	76330	122-587	6.0 - 7.5	8.7 on 6.5	26.0	10.0	800	1510@44		
225/60R15	96H	RBL	90544	216-497	6.0 - 8.0	9.0 on 6.5	25.6	10.0	813	1565@44		
225/60R15	96V	RBL	83066	208-497	6.0 - 8.0	9.0 on 6.5	25.6	10.0	813	1565@44		
205/50R16	87V	RBL	88328	208-203	5.5 - 7.5	8.4 on 6.5	24.1	10.0	863	1201@44		
P205/55R16	89T	BSW	27251	122-365	5.5 - 7.5	8.4 on 6.5	24.9	10.0	835	1279@44		3Q
205/55R16	90H	RBL	94967	216-324	5.5 - 7.5	8.4 on 6.5	24.9	10.0	835	1323@44		
205/55R16	90V	RBL	48105	208-324	5.5 - 7.5	8.4 on 6.5	24.9	10.0	835	1323@44		
P205/60R16	91T	BSW	68417	122-598	5.5 - 7.5	8.2 on 6.0	25.7	10.0	809	1356@44		
P205/65R16	94T	BSW	39883	122-643	5.5 - 7.5	8.2 on 6.0	26.5	10.0	785	1477@44		3Q
P215/50R16	89V	RBL	47261	208-620	6.0 - 7.5	8.9 on 7.0	24.5	10.0	849	1279@44		
P215/55R16	91T	BSW	73010	122-146	6.0 - 7.5	8.9 on 7.0	25.3	10.0	822	1356@44		
215/55R16	93H	RBL	96941	216-585	6.0 - 7.5	8.9 on 7.0	25.3	10.0	822	1433@44		
P215/60R16	94H	RBL	53425	216-278	6.0 - 7.5	8.7 on 6.5	26.1	10.0	797	1477@44		
P215/60R16	94T	BSW	71964	122-278	6.0 - 7.5	8.7 on 6.5	26.1	10.0	797	1477@44		
P215/60R16	94V	RBL	84579	208-278	6.0 - 7.5	8.7 on 6.5	26.1	10.0	797	1477@44		
215/65R16	98T	BSW	46501	122-862	6.0 - 7.5	8.7 on 6.5	27.0	10.0	770	1653@44		
225/50R16	92V	RBL	68569	208-251	6.0 - 8.0	9.2 on 7.0	24.9	10.0	835	1389@44		
225/55R16	95H	RBL	60007	216-280	6.0 - 8.0	9.2 on 7.0	25.8	10.0	806	1521@44		
225/55R16	95V	RBL	96193	208-280	6.0 - 8.0	9.2 on 7.0	25.8	10.0	806	1521@44		
P225/60R16	97H	RBL	67194	216-274	6.0 - 8.0	9.0 on 6.5	26.6	10.0	782	1609@44		
P225/60R16	97T	BSW	80226	122-274	6.0 - 8.0	9.0 on 6.5	26.6	10.0	782	1609@44		
225/60R16	98V	RBL	41254	208-555	6.0 - 8.0	9.0 on 6.5	26.6	10.0	782	1653@44		
P235/55R16	96T	BSW	56768	122-369	6.5 - 8.5	9.7 on 7.5	26.1	10.0	797	1565@44		
P235/60R16	99H	RBL	77769	216-474	6.5 - 8.5	9.5 on 7.0	27.1	10.0	768	1709@44		
P245/50R16	96V	RBL	48651	208-252	7.0 - 8.5	10.0 on 7.5	25.7	10.0	809	1576@44		
215/50R17	91V	RBL	72569	208-093	6.0 - 7.5	8.9 on 7.0	25.5	10.0	816	1356@44		
P225/55R17	95T	BSW	66132	122-370	6.0 - 8.0	9.2 on 7.0	26.8	10.0	776	1521@44		
P235/45R17	93H	RBL	78073	216-425	7.5 - 9.0	9.3 on 8.0	25.4	10.0	819	1433@44		
P245/45R17	95H	RBL	45809	216-266	7.5 - 9.0	9.6 on 8.0	25.7	10.0	809	1521@44		
Traction T/A Spec												
P215/65R16	96T	BSW	81499A	516-170	6.0 - 7.5	8.8 on 6.5	26.8	9.5	776	1565@44	F	
P235/60R16	99T	BSW	16785A	516-474	6.5 - 8.5	9.5 on 7.0	27.1	9.5	768	1709@44	HY	
P235/65R17	103T	BSW	50496A	306-897	6.5 - 8.5	9.3 on 7.0	29.2	10.0	712	1929@35	DC	

Original Equipment Key: DC = Daimler Chrysler, F = Ford, HY = Hyundai
ADiffers from tread pattern shown.

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To assure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires and they should never inflate beyond 40 psi to seat beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.
DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

*For speeds over 160km/h (100 mph), load and inflation must be adjusted according to the table below.

T-Speed Rated Sizes:	100	106	112	118
Maximum Speed (mph)	0.0	1.0	2.0	3.0
Inflation Increase (psi)	100	100	100	100
Load Capacity (% of max)				

H-Speed Rated Sizes:	100	106	112	118	124	130
Maximum Speed (mph)	0.0	1.0	2.0	3.0	4.0	5.0
Inflation Increase (psi)	100	100	100	100	100	100
Load Capacity (% of max)						

V-Speed Rated Sizes:	100	106	112	118	124	130	136	143	149
Maximum Speed (mph)	0.0	0.1	0.2	0.3	0.4	0.5	0.5	0.5	0.5
Inflation Increase (psi)	100	100	100	100	100	100	97	94	91
Load Capacity (% of max)									

BF Goodrich[®]
Tires
TAKE CONTROL[®]