




Michelin® Pilot® XGT® Z4 tires take the legendary performance characteristics of the Michelin® Pilot® XGT® V4 and Michelin® Pilot® XGT® H4 tires to the next level in a Z-rated all-season performance tire. Michelin Pilot XGT Z4 tires balance tight and responsive handling in nearly any weather condition with long treadwear and a smooth, quiet ride.

### Key Benefits:

- High level of comfort and long tread life in an ultra-high performance tire
- Exceptional high-speed handling and durability
- Excellent street handling

### Tire Specifics:

- All-season tire
- W-speed rated

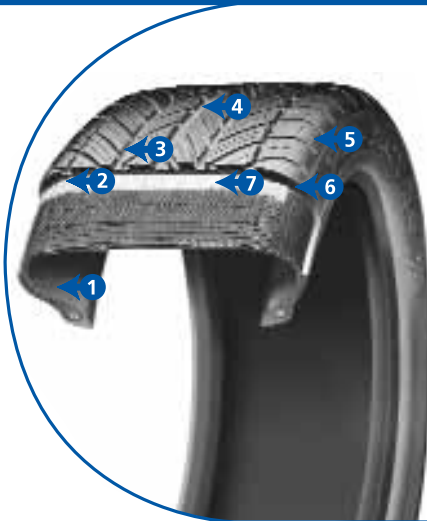

- 1 Combining good ride compliance with responsive steering and handling is what the Bead Tension Structure is designed for.
- 2 Maintained tread block stability and outstanding dry grip and steering response are promoted by High Modulus Undertread™.
- 3 Enhanced cornering power and steering feel, excellent wet and snow traction, stabilized tread blocks, and improved dry performance, all thanks to zig-zag, bridged torque-locking sipes.
- 4 Efficient water evacuation from the contact patch and improved resistance to hydroplaning because of three large circumferential grooves.
- 5 Better overall wet traction and reduced tread noise fostered by radically angled, variable-width lateral grooves.
- 6 Maximized performance in poor weather conditions is what this weather-tuned Advanced Technology™ tread compound helps provide.
- 7 Controlled tire shape and handling characteristics, due to size-optimized BAZ Technology™ (spiral-wrapped nylon Banded At Zero degrees to tire rotation).

### Performance at a glance:

Tread Life: 6 Wet Traction: 8 Quiet Ride: 7 Handling: 8 Winter Traction: 6 Mud Traction: N/A

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)
P225/50ZR16	91W	RRBL	53175	6.0 - 8.0	9.3 on 7.0	24.7	10.0	842	1367@51
P225/55ZR16	94W	RRBL	75991	6.0 - 8.0	9.3 on 7.0	25.5	10.0	814	1477@51
P225/60ZR16	97W	RRBL	68451	6.0 - 7.5	9.2 on 6.5	26.3	10.0	789	1609@51
225/45ZR17	90W	RRBL	86321	7.0 - 8.5	8.9 on 7.5	25.0	10.0	833	1323@51
P225/50ZR17	93W	RRBL	48291	6.0 - 8.0	9.0 on 7.0	25.5	10.0	813	1433@51
P235/45ZR17/LL	87W	RRBL	81873	7.5 - 9.0	9.3 on 8.0	25.2	10.0	824	1201@51
235/50ZR17	96W	RRBL	44642	6.5 - 8.5	9.7 on 7.5	26.5	10.0	782	1565@51
245/45ZR17	95W	RRBL	89568	7.5 - 9.0	9.9 on 8.0	25.5	10.0	814	1521@51
245/40ZR18	93W	RRBL	66915	8.0 - 9.5	9.9 on 8.5	25.4	10.0	814	1433@51
P255/45ZR18/LL	93W	RRBL	61094	8.0 - 9.5	10.4 on 8.5	26.8	10.0	770	1433@51
275/40ZR18	99W	RRBL	55677	9.0 - 11.0	10.9 on 9.5	26.7	10.0	780	1709@51

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

**WARNING:** Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

**DANGER:** Never mount a 16" diameter tire on a 16.5" rim.  
**DANGER:** Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160 km/h (100 mph), load and inflation must be adjusted according to the table below.

W-Speed Rated Sizes:	118	124	130	136	143	149	155	161	168
Maximum Speed (mph)	0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Inflation Increase (psi)	0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85

### UTQG Rating

Treadwear 300  
 Traction A  
 Temperature A