



Designed to meet the demands of high performance drivers, the new Michelin® Pilot® Alpin® PA2™ tires combine legendary Pilot handling with the ability to grip through snow and ice. As our premier ultra-high performance winter tires, Michelin Pilot Alpin PA2 tires offer the highest performance characteristics of our winter tires. They help deliver consistent, high-end performance in cold-weather conditions by combining rubber compounds that maintain flexibility in cold temperatures with a tread design that bites through snow and ice while helping to maintain excellent wet or dry performance.

Key Benefits:

- Optimized for snow and ice traction
- Exceptional wet and dry handling
- Enhanced resistance to hydroplaning

Tire Specifics:

- Winter tire
- Designed for ultra-high performance cars
- H- and V-speed rated




Meets the RMA* snow traction performance requirements.
*Rubber Manufacturers Association



H-Rated



V-Rated

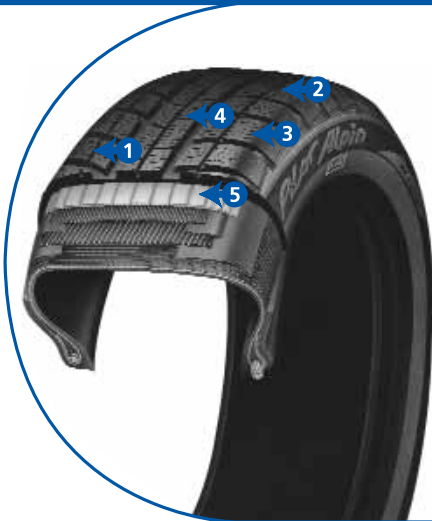

- 1 Enhanced handling in all winter driving conditions promoted by the auto-blocking effect of our BDS (Bi-Directional Sipe) and VTS (Variable Thickness Sipe) Systems.
- 2 Predictable progressive handling thanks to new rounder shoulder profiles.
- 3 Optimal adherence to all types of cold winter surfaces provided by a new generation of tread compounds that remain flexible and adaptable.
- 4 Enhanced resistance to hydroplaning provided by an optimized tread design that effectively breaks through water films.
- 5 Optimized high-speed handling and durability with renowned Michelin ride comfort prompted by size-optimized BAZ Technology™ (spiral-wrapped nylon Banded At Zero degrees to tire rotation).

Performance at a glance:

Tread Life: 7 Wet Traction: 10 Quiet Ride: 9 Handling: 10 Winter Traction: 8 Mud Traction: N/A

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)
195/55R15	85H	RRBL	85185	5.5 - 7.0	7.9 on 6.0	23.4	11.0	888	1135@51
195/60R15	88H	RRBL	49662	5.5 - 7.0	7.9 on 6.0	24.2	11.0	859	1235@51
195/65R15	91H	RRBL	70402	5.5 - 7.0	7.9 on 6.0	25.0	11.0	832	1356@51
195/65R15	91H BMW	RRBL	57656	5.5 - 7.0	7.9 on 6.0	25.0	11.0	832	1356@51
205/60R15	91H	RRBL	83369	5.5 - 7.5	8.2 on 6.0	24.7	11.0	843	1356@51
205/65R15	94H	RRBL	99988	5.5 - 7.5	8.2 on 6.0	25.5	11.0	817	1477@51
215/65R15	96H	RRBL	81003	6.0 - 7.5	8.7 on 6.5	26.0	11.0	799	1565@51
205/50R16	87H	RRBL	56881	5.5 - 7.5	8.4 on 6.5	24.1	11.0	863	1201@51
205/55R16	91H	RRBL	70013	5.5 - 7.5	8.4 on 6.5	24.9	11.0	836	1356@51
205/55R16	91H BMW	RRBL	58871	5.5 - 7.5	8.4 on 6.5	24.9	11.0	836	1356@51
205/55R16	91H MO	RRBL	88625	5.5 - 7.5	8.4 on 6.5	24.9	11.0	836	1356@51
205/60R16	92H	RRBL	47644	5.5 - 7.5	8.2 on 6.0	25.7	11.0	810	1389@51
215/55R16	93H	RRBL	96138	6.0 - 7.5	8.9 on 7.0	25.3	11.0	823	1433@51
215/60R16/RF	99H	RRBL	82439	6.0 - 7.5	8.7 on 6.5	26.1	11.0	796	1709@50
215/65R16	98H	RRBL	86278	6.0 - 7.5	8.7 on 6.5	27.0	11.0	770	1653@51
225/55R16	95H	RRBL	77759	6.0 - 8.0	9.2 on 7.0	25.7	11.0	808	1521@51
225/55R16	95H	RRBL	64632	6.0 - 8.0	9.2 on 7.0	25.7	11.0	808	1521@51
225/60R16/RF	102V	RRBL	72514	6.0 - 8.0	9.0 on 6.5	26.6	11.0	782	1874@50
225/60R16	98H	RRBL	91580	6.0 - 8.0	9.0 on 6.5	26.6	11.0	782	1653@51
205/50R17/RF	93V	RRBL	87472	5.5 - 7.5	8.4 on 6.5	25.1	11.0	828	1433@50
205/50R17/RF	93V BMW	RRBL	43053	5.5 - 7.5	8.4 on 6.5	25.1	11.0	828	1433@50
215/45R17	87H	RRBL	62274	7.0 - 8.0	8.4 on 7.0	24.6	11.0	844	1201@51
215/55R17/RF	98V	RRBL	84591	6.0 - 7.5	8.9 on 7.0	26.3	11.0	791	1653@50
225/45R17	91H	RRBL	53820	7.0 - 8.5	8.9 on 7.5	25.0	11.0	833	1356@51
225/45R17	91H MO	RRBL	68138	7.0 - 8.5	8.9 on 7.5	25.0	11.0	833	1356@51
225/45R17/RF	94V	RRBL	83594	7.0 - 8.5	8.9 on 7.5	25.0	11.0	833	1477@50
225/45Z17/RF	94V BMW	RRBL	68129	7.0 - 8.5	8.9 on 7.5	25.0	11.0	833	1477@50
225/50Z17	94V ZP	RRBL	45979	6.0 - 8.0	9.2 on 7.0	25.9	11.0	803	1477@51
225/50R17/RF	98H	RRBL	84885	6.0 - 8.0	9.2 on 7.0	25.9	11.0	803	1653@50
225/50R17/RF	98V	RRBL	96622	6.0 - 8.0	9.2 on 7.0	25.9	11.0	803	1653@50
225/55R17/RF	101V	RRBL	93193	6.0 - 8.0	9.2 on 7.0	26.8	11.0	777	1819@50
225/55Z17	97H	RRBL	92929	6.0 - 8.0	9.2 on 7.0	26.8	11.0	777	1609@51
235/45R17	94H	RRBL	71086	7.5 - 9.0	9.3 on 8.0	25.4	11.0	820	1477@51
235/50R17/RF	100V	RRBL	88587	6.5 - 8.5	9.6 on 7.5	26.3	11.0	791	1764@50
235/55R17/RF	103V BMW	RRBL	84978	6.5 - 8.5	9.6 on 7.5	27.2	11.0	766	1929@50
245/45R17/RF	99V MO	RRBL	43344	7.5 - 9.0	9.6 on 8.0	25.7	11.0	810	1709@50
255/40Z17/RF	98V	RRBL	85351	8.5 - 10.0	10.2 on 9.0	25.0	11.0	831	1653@50
235/40R18	91V NO	RRBL	78433	8.0 - 9.5	9.5 on 8.5	25.4	11.0	819	1356@51
245/40R18/RF	97V	RRBL	42957	8.0 - 9.5	9.8 on 8.5	25.7	11.0	809	1609@50
245/45R18/RF	100V	RRBL	65749	7.5 - 9.0	9.6 on 8.0	26.7	11.0	780	1764@50
245/50R18/RF	104V BMW	RRBL	58240	7.0 - 8.5	10.0 on 7.5	27.7	11.0	752	1984@50
255/40R18	95V NO	RRBL	72465	8.5 - 10.0	10.2 on 9.0	26.0	11.0	799	1521@51
265/40Z18/RF	101V NO	RRBL	56279	9.0 - 10.5	10.7 on 9.5	26.3	11.0	790	1819@50
275/50R19/RF	112H MO	RRBL	64933	7.5 - 9.5	11.2 on 8.5	29.9	11.0	696	2469@50

1. The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
 2. Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.
 RF = European designation for XL (Extra Load)

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.
DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160 km/h (100 mph), load and inflation must be adjusted according to the table below.

H-Speed Rated Sizes:	100	106	112	118	124	130
Maximum Speed (mph)	100	106	112	118	124	130
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0
Load Capacity (% of max.)	100	100	100	100	100	100

V-Speed Rated Sizes:	100	106	112	118	124	130	136	143	149
Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0.0	1.0	2.0	3.0	4.0	5.0	5.0	5.0	5.0

