



Michelin® Pilot® MXM™ tires cater to the capabilities of your high performance luxury touring vehicle. A specially designed tread pattern helps resist hydroplaning on wet roads, and an advanced tread compound helps deliver a smooth, quiet ride. Michelin Pilot MXM tires also feature low European profiles for confident handling on dry pavement, as well as a sporty look.

Key Benefits:

Superb responsiveness for aggressive driving


Quiet and comfortable for highway touring

Excellent wet-weather traction

Tire Specifics:

Summer tires

V- and W-speed rated

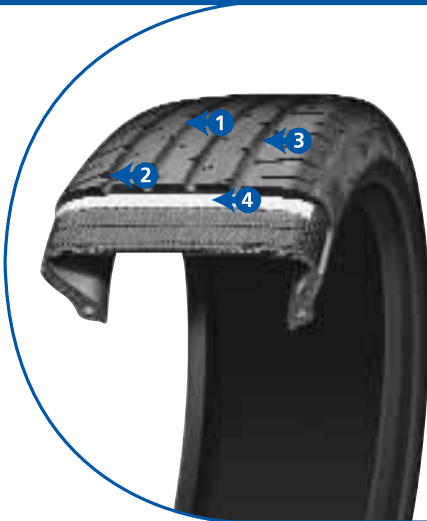

- 1 Enhanced handling and quick steering response provided by the European performance tire profile.
- 2 Significant adhesion levels, long wear and ride comfort with low noise levels are the result of our special Advanced Technology™ tread compound.
- 3 Excellent wet traction with increased resistance to hydroplaning is provided by four wide circumferential grooves.
- 4 Resistance to centrifugal distortion, which optimizes high-speed handling and durability, is provided by size-optimized BAZ Technology™ (spiral-wrapped nylon Banded At Zero degrees to tire rotation).

Performance at a glance:

Tread Life: 6 Wet Traction: 9 Quiet Ride: 7 Handling: 10 Winter Traction: N/A Mud Traction: N/A

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)	Original Equipment
225/55R15	92V	RRBL	26884	6.0 - 8.0	9.2 on 6.0	24.8	11.0	844	1389@51	
205/55ZR16	91W	RRBL	91487	5.5 - 7.5	8.8 on 6.5	25.3	10.0	822	1356@51	VW
225/50R16	92V	RRBL	53888	6.0 - 8.0	9.6 on 8.0	24.8	11.0	841	1389@51	BM
225/50ZR16	92W	RRBL	66859	6.0 - 8.0	9.1 on 6.0	24.8	11.0	837	1389@51	BM
225/55R16	94V	RRBL	64654	6.0 - 8.0	9.2 on 7.0	25.7	11.0	808	1477@51	L
225/45R17	91W	RRBL	52877	7.0 - 8.5	8.6 on 7.0	24.8	10.0	844	1356@51	BM, SA

Original Equipment Key: BM = BMW, L = Lexus, SA = SAAB, VW = Volkswagen

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.
DANGER: Never mount a 17" diameter tire on a 17.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160 km/h (100 mph), load and inflation must be adjusted according to the table below.

V-Speed Rated Sizes:									
Maximum Speed (mph)	100	106	112	118	124	130	136	143	149
Inflation Increase (psi)	0	1	2	3	4	5	5	5	5
Load Capacity (% of max)	100	100	100	100	100	100	97	94	91

W-Speed Rated Sizes:									
Maximum Speed (mph)	118	124	130	136	143	149	155	161	168
Inflation Increase (psi)	0	1.5	3.0	4.5	6.0	7.5	7.5	7.5	7.5
Load Capacity (% of max)	100	100	100	100	100	100	95	90	85

UTQG Rating

Treadwear 140
Traction A
Temperature A