




Michelin® Pilot® XGT® V4 tires are high performance all-season tires that also offer the long tread life and comfort needed for everyday driving. Utilizing our patented BAZ Technology™, which helps resist distortion at high speeds, Michelin Pilot XGT V4 tires help provide exceptional handling along with a smooth, comfortable ride.

Key Benefits:

- High level of comfort and long tread life
- Exceptional high-speed handling and durability
- Excellent street handling

Tire Specifics:

- All-season tire
- V-speed rated
- Original equipment on vehicles such as:
2005 Toyota Celica

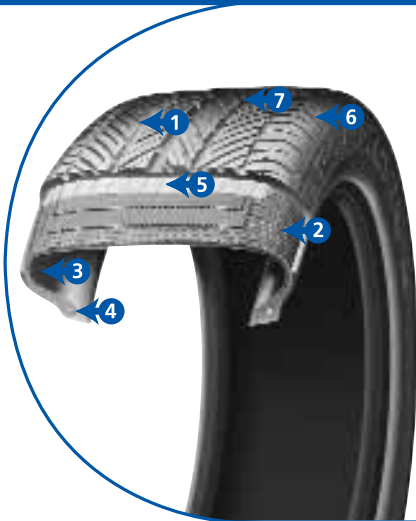

- 1 Maximized performance in poor weather conditions with weather-tuned Advanced Technology™ tread compound.
- 2 Excellent handling promoted by two-ply sidewall rayon casing.
- 3 Good ride compliance with responsive steering and handling because of Bead Tension Structure.
- 4 Tire shape is maintained during manufacturing and driving with the help of spiral-wound cable beads.
- 5 Built to resist centrifugal distortion, its high-speed handling and durability are offered by size-optimized BAZ Technology™ (spiral-wrapped nylon Banded At Zero degrees to tire rotation).
- 6 Good overall wet traction and reduced tread noise are cultivated by the radically angled, variable-width lateral grooves that help accelerate water ejection from the contact patch.
- 7 Excellent wet traction with increased resistance to hydroplaning is fostered by four wide circumferential grooves.

Performance at a glance:

Tread Life: 8 Wet Traction: 8 Quiet Ride: 9 Handling: 8 Winter Traction: 7 Mud Traction: N/A

Tire Size	Service Description	Sidewall	MSPN	Rim Width Range (inches)	Section Width on Measuring Rim Width	Overall Diameter	Tread Depth (in/32nds)	Revs/Mile at 45 mph	Max Load (lbs@psi)	Original Equipment
P195/55R15	84V	RRBL*	30567	5.5 - 7.0	7.9 on 6.0	23.4	10.0	913	1102@44	AC,HO,HY
P205/50R15	84V	RRBL DIR	80225	6.0 - 7.5	8.4 on 6.5	23.1	10.0	902	1113@44	
P205/55R15	87V	RRBL DIR	82230	5.5 - 7.5	8.3 on 6.5	24.0	10.0	868	1201@44	T
P205/60R15	90V	RRBL DIR	76197	5.5 - 7.0	8.4 on 6.0	24.7	10.0	845	1301@44	
P215/60R15	93V	RRBL DIR	77750	6.0 - 7.0	8.9 on 6.5	25.2	10.0	832	1411@44	
P215/65R15	95V	RRBL DIR	86794	6.0 - 7.0	8.9 on 6.5	26.0	10.0	805	1510@44	
P225/60R15	95V	RRBL DIR	55539	6.0 - 7.5	9.3 on 6.5	25.6	10.0	817	1521@44	
205/55R16	89V	RRBL*	31772	5.5 - 7.5	8.4 on 6.5	25.2	10.0	984	1320@44	V
P215/55R16	91V	RRBL DIR*	83661	6.0 - 7.5	8.9 on 7.0	25.3	10.0	822	1356@44	
P215/60R16	94V	RRBL DIR	71336	6.0 - 7.0	8.9 on 6.5	26.1	10.0	800	1609@44	
P225/50R16	91V	RRBL DIR	53193	6.5 - 8.0	9.4 on 7.0	24.9	10.0	835	1367@44	
P225/60R16	97V	RRBL*	20538	6.0 - 8.0	9.0 on 6.5	26.6	10.0	1039	1609@44	DC
P225/60R16	97V	RRBL DIR	72558	6.0 - 7.5	9.2 on 6.5	26.6	10.0	786	1609@44	
P255/50R16	99V	RRBL DIR	45692	7.5 - 9.0	10.5 on 8.0	26.0	10.0	801	1687@44	

Original Equipment Key: AC = Acura, DC = DaimlerChrysler, HO = Honda, HY = Hyundai, T = Toyota, V = Volvo

*Non-Pilot version of XGTV4. Tread pattern different than photo pictured.

- The dimensions shown are average values for tires measured on specified measuring rim width. Individual tires may vary from data shown.
- Section width varies approximately 0.2" (5mm) for every 0.5" change in rim width.

WARNING: Serious or fatal injury may result from tire failure due to underinflation or overloading. To ensure correct air pressure and vehicle load, refer to vehicle owner's manual or tire information placard on the vehicle. Serious injury or death may result from explosion of tire/rim assembly due to improper mounting. Only tire professionals should mount tires, and they should never inflate beyond 40 psi to seat the beads. Before mixing types of tires in any configuration on any vehicle, be sure to check the vehicle owner's manual for its recommendations.

DANGER: Never mount a 16" diameter tire on a 16.5" rim.

Inflation pressure increase must not exceed the maximum pressure branded on the tire sidewall. When a customer requests a replacement tire with a lower speed rating than the original equipment tire, you must clearly communicate to him or her that the handling of the vehicle may be different, and that its maximum speed capability is limited to that of the lowest speed-rated tire on the vehicle. Exceeding the lawful speed limit is neither recommended nor endorsed.

For high-speed driving, additional inflation pressure and possibly reduced tire loading and/or upsizing is required. In the absence of specific recommendations by the vehicle manufacturer, use the following guidelines based on those in the European Tyre and Rim Technical Organization Standards Manual.

For speeds over 160 km/h (100 mph), load and inflation must be adjusted according to the table below.

V-Speed Rated Sizes:	100	106	112	118	124	130	136	143	149
Maximum Speed (mph)	0	1	2	3	4	5	5	5	5
Inflation Increase (psi)	0	1	2	3	4	5	5	5	5
Load Capacity (% of max)	100	100	100	100	100	100	97	94	91

UTQG Rating

Treadwear 300
 Traction A
 Temperature A

